

IMAS GROUP
REAL QUALITY MADE IN ITALY







CIRCULATING PUMP U

CIRCULATEURS GAMME U

ЦИРКУЛЯЦИОННЫХ НАСОСОВ U






Diagrams of Pumps: - Courbes de Performance: Схемы стандартных насосов:

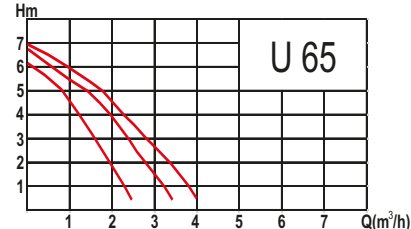

Technical data: Caractéristiques techniques: Технические данные:

	U 25	U 35	U 55	U 65	U 75
Max flow H:					
Débit maximal:	2,75m	4,00m	6,00m	7,00m	8,00m
Максимальный расход:					
I (A) Level III					
I (A) Vitesse III	0,12	0,17	0,17	0,21	0,53
I (A) уровень III					
I (A) Level II					
I (A) Vitesse II	0,17	0,26	0,27	0,32	0,69
I (A) уровень II					
I (A) Level I					
I (A) Vitesse I	0,20	0,3	0,35	0,44	0,75
I (A) уровень I					

Dimension diagrams: Diagrammes de dimension: Диаграммы Размер::



	Pump type Type de circulateur Тип насоса	Casing Corps кожух	Lenght Longueur Длина	DN	Connection size (threaded) FR raccord union присоединительный размер	Power consumption Puissance debit потребляемая мощность (W)
	U 25-20 110SB	Brass - Laiton - латунь	110	20	G 1 1/4"	28-46
	U 25-25 110SB	Brass - Laiton - латунь	110	25	G 1 1/2"	28-46
	U 25-15 130	Cast Iron - Fonte - чугун	130	15	G 1"	28-46
	U 25-20 130	Cast Iron - Fonte - чугун	130	20	G 1 1/4"	28-46
	U 25-25 130	Cast Iron - Fonte - чугун	130	25	G 1 1/2"	28-46
	U 25-20 180	Cast Iron - Fonte - чугун	180	20	G 1 1/4"	28-46
	U 25-25 180	Cast Iron - Fonte - чугун	180	25	G 1 1/2"	28-46
	U 25-32 180	Cast Iron - Fonte - чугун	180	32	G 2"	28-46
	U 35-20 110SB	Brass - Laiton - латунь	110	20	G 1 1/4"	28-63
	U 35-25 110SB	Brass - Laiton - латунь	110	25	G 1 1/2"	28-63
	U 35-15 130	Cast Iron - Fonte - чугун	130	15	G 1"	28-63
	U 35-20 130	Cast Iron - Fonte - чугун	130	20	G 1 1/4"	28-63
	U 35-25 130	Cast Iron - Fonte - чугун	130	25	G 1 1/2"	28-63
	U 35-20 180	Cast Iron - Fonte - чугун	180	20	G 1 1/4"	28-63
	U 35-25 180	Cast Iron - Fonte - чугун	180	25	G 1 1/2"	28-63
	U 35-32 180	Cast Iron - Fonte - чугун	180	32	G 2"	28-63
	U 55-20 110SB	Brass - Laiton - латунь	110	20	G 1 1/4"	39-80
	U 55-25 110SB	Brass - Laiton - латунь	110	25	G 1 1/2"	39-80
	U 55-15 130	Cast Iron - Fonte - чугун	130	15	G 1"	39-80
	U 55-20 130	Cast Iron - Fonte - чугун	130	20	G 1 1/4"	39-80
	U 55-25 130	Cast Iron - Fonte - чугун	130	25	G 1 1/2"	39-80
	U 55-20 180	Cast Iron - Fonte - чугун	180	20	G 1 1/4"	39-80
	U 55-25 180	Cast Iron - Fonte - чугун	180	25	G 1 1/2"	39-80
	U 55-32 180	Cast Iron - Fonte - чугун	180	32	G 2"	39-80
	U 65-20 110SB	Brass - Laiton - латунь	110	20	G 1 1/4"	50-100
	U 65-25 110SB	Brass - Laiton - латунь	110	25	G 1 1/2"	50-100
	U 65-15 130	Cast Iron - Fonte - чугун	130	15	G 1"	50-100
	U 65-20 130	Cast Iron - Fonte - чугун	130	20	G 1 1/4"	50-100
	U 65-25 130	Cast Iron - Fonte - чугун	130	25	G 1 1/2"	50-100
	U 65-20 180	Cast Iron - Fonte - чугун	180	20	G 1 1/4"	50-100
	U 65-25 180	Cast Iron - Fonte - чугун	180	25	G 1 1/2"	50-100
	U 65-32 180	Cast Iron - Fonte - чугун	180	32	G 2"	50-100
	U 75-25 130	Cast Iron - Fonte - чугун	130	25	G 1 1/2"	122-170
	U 75-25 180	Cast Iron - Fonte - чугун	180	25	G 1 1/2"	122-170
	U 75-32 180	Cast Iron - Fonte - чугун	180	32	G 2"	122-170

NUOVA IMAS S.r.l